

PRODUCT SHEET


Column Table Lamp, Portable

by Norm Architects

Column Table Lamp, Portable

BY NORM ARCHITECTS

Powered by battery for the ultimate in freedom and flexibility, the striking mushroom shape of the Column Table Lamp, Portable illuminates spaces indoors and out with its inviting glow, adjustable to three settings. The cordless design charges via a concealed magnetic connector and cable.

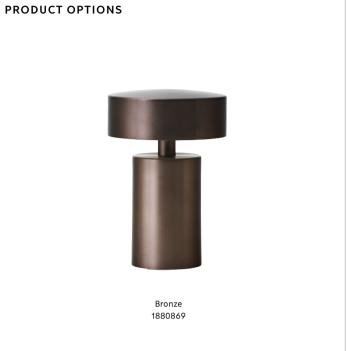

Column Table Lamp, Portable, by Norm Architects




Column Table Lamp, Portable


BY NORM ARCHITECTS

TECHNICAL SPECIFICATIONS PRODUCT TYPE VOLTAGE CANOPY CE: 220-230 V (Plug: 5 V) N/A Table lamp US: 110-130 V (Plug: 5 V) COLLI CORD MATERIAL AND COLOUR LIGHT SOURCE & PVC, black (magnetic charging cord), black plug. ENERGY EFFICIENCY CLASS 1 x G4 (bulb included) ENVIRONMENT G4-CR2 CORD LENGTH 80 cm / 31,5" Energy level: F DIMENSIONS CLASSIFICATION LIGHT SPECIFICATION H: 17,5 cm / 6,9" Ø: 12 cm / 4,7" 150 lm CERTIFICATIONS 2700 K COLOUR RA > 80 CE certified, tests can be obtained upon request. Bronzed brass BATTERY PACKAGING TYPE PRODUCTION PROCESS Charging time: approx. 6 hrs Brown gift box Discharging, level 1: approx. 50 hrs Deep drawn alumi Discharging, level 2: approx. 18,5 hrs PACKAGING MEASUREMENTS (H x W x D) Discharging, level 3: approx. 12 hrs MATERIALS 23,5 cm x 17,5 cm x 17,5 cm / 10" x 6,9" x 6,9" Anodized aluminium, LED, ABS DIMMER MATERIALS & MAINTENANCE Yes, 3 step dimmer. Dimmer knob on bottom of base. WEIGHT Please visit menuspace.com for materials and care 0,6 kg / 1,3 lb and maintenance instructions.

LUMINOUS INTENSITY DISTRIBUTION (UNIT: CD)



— C0 / 180, 100.7 — C90 / 270, 102.2 TECHNICAL DRAWING



Ø: 12 cm / 4,7"